

Kawasaki

Let the good times roll.

KLF300 2X4

SIMPLY BRILLIANT



Model Year 2009


FEATURES



DUAL MODE DIFFERENTIAL



DOUBLE WISHBONE

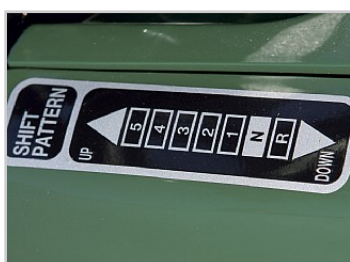

Transmission



Dual Mode differential

SPECIFICATIONS

Engine type	air-cooled, 4-stroke single
Displacement	290 cm ³
Bore x stroke	76 x 64 mm
Compression ratio	8.6:1
Valve/Induction system	SOHC, 2 valves
Maximum power	14.3 kW (20 PS)/6,500 r/min
Maximum torque	22.5 N-m /5,500 rpm
Fuel system	Carburetor: Keihin CV32
Ignition	TCBI
Starting	Electric starter with auxiliary recoil
Transmission	5-speed semi-automatic with reverse
Final Drive	Shaft
Suspension, front	Double wishbone with twin shock absorbers
Suspension, rear	Quad-Link with twin shock absorbers
Wheel travel, front	125 mm
Wheel travel, rear	120 mm
Tyre, front	AT 22 x 9-10
Tyre, rear	AT 24 x 11-10
Brakes, front	140 mm discs with single piston calipers
Brakes, rear	160 mm drums
Turning radius	2.9 m (diff lock) / 2.6 m (diff mode)
Dimensions (L x W x H)	1,910 x 1,160 x 1,065 mm
Track width, front / rear	834 / 844 mm
Ground Clearance	195 / 154 mm (centre of chassis / rear final drive)
Rack Load Capacity, front / rear	Front: 40 kg, rear: 70 kg
Towing Capacity	317 kg
Fuel capacity	9 litres
Dry weight	229 kg
Curb Mass	239 kg