

MULE 610 4X4

small size. BIG performance



Model Year 2009


FEATURES



Air-cooled engine



Brilliant ergonomics

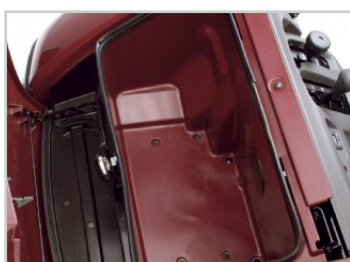

Space front and rear

SPECIFICATIONS

Engine type	Air cooled, OHV, 4-stroke single
Displacement	401cm ³
Maximum power	9.9kW (13.5 PS)/4,000rpm
Maximum torque	29.7N·m (3.0 kgf·m)/2,400rpm
Transmission	2 speed automatic, selectable 4WD plus reverse
Final Drive	Limited slip front differential, Dual-Mode rear differential
Electrical	12V, 14Ah
Drive Train	Automatic torque-converter, dual-range, forward, neutral, reverse
Suspension, front	Independent, MacPherson strut
Suspension, rear	Unit swing
Wheel travel, front	78mm
Wheel travel, rear	78,7mm
Steering	Rack & pinion
Tyre, front	24 x 9-10 (tubeless)
Tyre, rear	24 x 11-10 (tubeless)
Brakes, front	Dual hydraulic drums
Brakes, rear	Dual hydraulic drums
Turning radius	3.3m
Dimensions (L x W x H)	2,720 x 1,335 x 1,802mm
Cargo bed (L x W x H)	1,044 x 900 x 245mm
Wheelbase	1,779mm
Track width, front / rear	1,051/999mm
Ground Clearance	170mm
Vehicle Load Capacity	420kg
Cargo Bed Load Capacity	181kg
Towing Capacity	500kg
Curb Mass	458 kg
Fuel capacity	15,5 litres
Top speed	40 km/h